

# ZSJZ Series Water flow Detector 水流指示器



ZSJZ系列水流指示器为叶片型水流指示器，计算机设计叶片，50~200mm不同直径的管道。外形结构易于安装，便于维修。

甚至可以安装于某些室外管道。开关装置和延时机构装置可现场更换。

## 主要特征及技术指标



- 密封设计：延时装置防尘设计，即使盖子去掉也不会被灰尘及杂物污染影响延时。
- 开关动作可目测：使安装人员在强干扰情况下可设置延迟。
- 机构延时设置：可通过拨盘进行延时设置。
- 两套微动开关，100%同步。
- 特别的拆卸特性。
- 钢管尺寸成系列：从ZSJZ-50、ZSJZ-65、ZSJZ-80、ZSJZ-100、ZSJZ-125、ZSJZ-150至ZSJZ-200，合于公称直径为50mm、65mm、80mm、100mm、125mm、150mm、200mm的管道。
- 最大工作压力：1.7MPa
- 水流速度：15升/分钟~37.5升/分钟
- 触点容量：10A@125/250VAC  
2.5A@24VDC
- 工作温度：0℃~49℃
- 重量：1.4~3.2kg
- 执行标准：GB5135.7-2003@ul364



# ZSJZ Series Water flow Detector 水流指示器



## 安装方式及接线方法

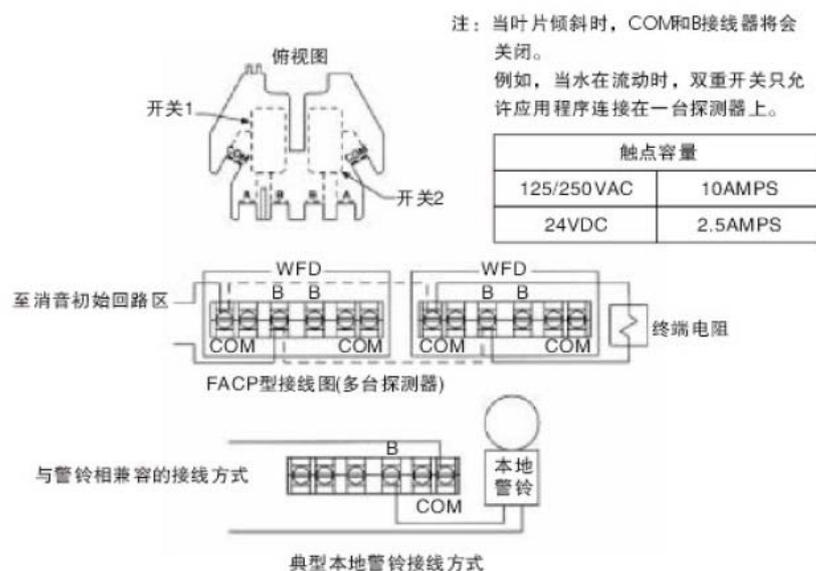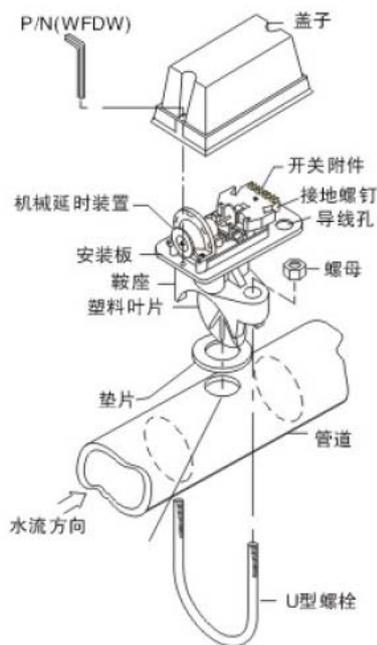

## 型号及尺寸

型号	名称	尺寸
ZSJZ-50 (WFD20)	马鞍形水流指示器	50mm(2")
ZSJZ-65 (WFD25)	马鞍形水流指示器	65mm(2 1/2")
ZSJZ-80 (WFD30-2)	马鞍形水流指示器	80mm(3")
ZSJZ-100 (WFD40)	马鞍形水流指示器	100mm(4")
ZSJZ-125 (WFD50)	马鞍形水流指示器	125mm(5")
ZSJZ-150 (WFD60)	马鞍形水流指示器	150mm(6")
ZSJZ-200 (WFD80)	马鞍形水流指示器	200mm(8")



# WFD Series Waterflow Detector



UL Models	ULC/Canadian Models
WFD20	WFD20A
WFD25	WFD25A
WFD30-2	WFD30-2A
WFD35	WFD35A
WFD40	WFD40A
WFD50	WFD50A
WFD60	WFD60A
WFD80	WFD80A

### Replacement Parts

A3008-00	Retard Mechanism
A77-01-02	Terminal Block
546-7000	Cover Tamper Switch Kit
WFDW	Cover Wrench
WFDN4	Replacement gasket kit



### Product Overview

**New WFD30-2 models install in 2" hole sizes**

**UL models are NEMA 4 rated**

**Sealed retard mechanism assures that the retard is not contaminated by dust and dirt when the cover is removed**

**Visual switch activation permits installer to accurately set retard under noisy conditions**

**Rugged, dual SPDT switches are enclosed in a durable terminal block**

**Accommodates up to 12 AWG wire**

**100% synchronization activates both alarm panel and local bell simultaneously**

**System Sensor's WFD series is compatible with schedule 10 through 40 steel pipe, sizes 2" through 8", and can be mounted in a vertical or horizontal position.**

**Robust Construction.** The WFD series consists of a rugged, NEMA 4 rated enclosure. Designed for both indoor and outdoor use, the WFD series operates across a wide temperature range, from 32°F to 120°F.

**Reliable Performance.** UL listed models are equipped with tamper resistant cover screws to prevent unauthorized entry. Inside, two sets of SPDT (Form C) synchronized switches are enclosed in a durable terminal block to assure reliable performance.

**False Alarm Immunity.** The WFD series incorporates a mechanical retard feature, which minimizes the risk of false alarm due to pressure surges or air trapped in the sprinkler system. In addition, the mechanical retard's unique sealed design is immune to dust and other contaminants.

**Simplified Operation.** The WFD series is designed to simplify installation. Two conduit openings permit easy attachment to the local alarm system. The retard mechanism and dual SPDT switches are field-replaceable.



## Engineering Specifications

Vane-type waterflow detectors shall be installed on system piping as designated on the drawing and/or as specified herein. Detectors shall mount on any clear pipe span of the appropriate nominal size, either a vertical upflow or horizontal run, at least 6" from any fittings which may change water direction, flow rate, or pipe diameter or no closer than 24" from a valve or drain. Detectors shall have a sensitivity in the range of 4 to 10 gallons per minute and a static pressure rating of 450 psi\* for 2" - 8" pipes. The detector shall respond to waterflow in the specified direction after a preset time delay which is field adjustable. The delay mechanism shall be a sealed mechanical pneumatic unit with visual indication of actuation. The actuation mechanism shall include a polyethylene vane inserted through a hole in the pipe and connected by a mechanical linkage to the delay mechanism. Outputs shall consist of dual SPDT switches (Form C contacts). Two conduit entrances for standard fittings of commonly used electrical conduit shall be provided on the detectors. A grounding provision is provided. Unless noted, enclosures shall be NEMA 4 listed by Underwriters Laboratories Inc. All detectors shall be listed by Underwriters Laboratories Inc. for indoor or outdoor use.

## Standard Specifications

### Static Pressure Rating

450 PSI\*

### Triggering Threshold Bandwidth (Flow Rate)

4-10 GPM

### Maximum Surge

18 Feet Per Second (FPS)


### Compatible Pipe:

Steel water pipe, schedule 10 through 40

### Contact Ratings

Two sets of SPDT (Form C)  
10.0 A, 1/2 HP @ 125/250 VAC  
2.5 A @ 6/12/24 VDC

### Overall Dimensions Installed:

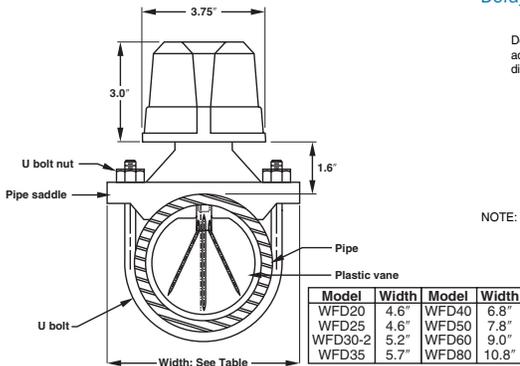

### Conduit Entrances

Two openings for 1/2" conduit. One open, one knock-out type

### Operating Temperature Range

32°F to 120°F (0°C to 49°C)

### Enclosure Rating\*

NEMA 4 – suitable for indoor/outdoor use


### Cover Tamper Switch

Standard with ULC models  
Optional for UL models, part no. 546-7000

### Shipping Weight

WFD20: 4.2 lbs.      WFD40: 5.2 lbs.  
WFD25: 4.3 lbs.      WFD50: 6.3 lbs.  
WFD30-2: 4.5 lbs.    WFD60: 6.8 lbs.  
WFD35: 4.7 lbs.      WFD80: 7.5 lbs.

### Delay Adjustment Dial:

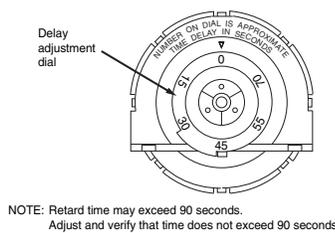

### Service Use


Automatic Sprinkler: NFPA-13  
One or Two Family Dwelling: NFPA 13D  
Residential Occupancies up to 4 Stories: NFPA 13R  
National Fire Alarm Code: NFPA-72

### Warranty

3 Years

### U.S. Patent Numbers

3,845,259  
4,782,333  
5,213,205

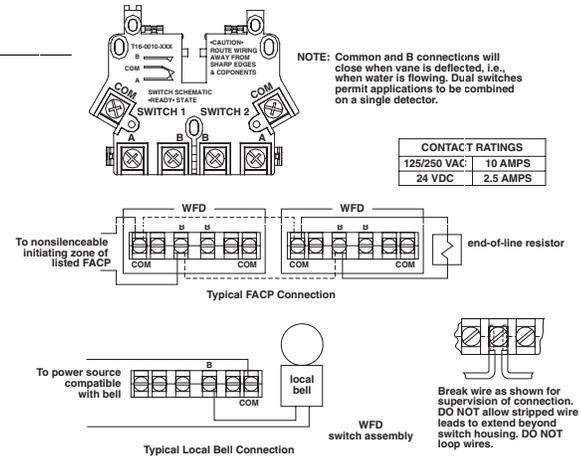

## Ordering Information

UL Model Numbers	ULC/Canadian Model Numbers	Pipe Size	Hole Size	Part Number	Description
WFD20	WFD20A	2"	1 1/4"	A3008-00	Retard mechanism
WFD25	WFD25A	2 1/2"	1 1/4"	A77-01-02	Terminal block
WFD30-2	WFD30-2A	3"	2"	546-7000	Tamper proof switch kit
WFD35	WFD35A	3 1/2"	1 1/4"	WFDW	Tamper proof wrench for cover
WFD40	WFD40A	4"	2"	WFDN4	Gasket kit
WFD50	WFD50A	5"	2"		
WFD60*	WFD60A	6"	2"		
WFD80*	WFD80A	8"	2"		

\*Maximum pressure rating 400 psi as approved by Factory Mutual.

## System Sensor Sales and Service

### System Sensor Headquarters

3825 Ohio Avenue  
St. Charles, IL 60174  
Ph: 800/SENSOR2  
Fx: 630/377-6495  
www.systemsensor.com

### System Sensor Canada

Ph: 905.812.0767  
Fx: 905.812.0771

### System Sensor Europe

Ph: 44.1403.891920  
Fx: 44.1403.891921

### System Sensor in China

Ph: 86.29.8832.0119  
Fx: 86.29.8832.5119

### System Sensor in Singapore

Ph: 65.6273.2230  
Fx: 65.6273.2610

### System Sensor – Far East

Ph: 85.22.191.9003  
Fx: 85.22.736.6580

### System Sensor – Australia

Ph: 613.54.281.142  
Fx: 613.54.281.172

### System Sensor – India

Ph: 91.124.237.1770 x.2700  
Fx: 91.124.237.3118

### System Sensor – Russia

Ph: 70.95.937.7982  
Fx: 70.95.937.7983